



High Pressure Check Valves CH Series

CH SERIES POPPET CHECK VALVES



- Working Pressure: up to 6000 psi (413 bar)
- Temperature Range: -65 to 400 °F
- End Connections:
 - Types: Tube fitting, NPT and ISO pipe
 - Sizes: 1/8" through 1" and 6, 8, 10, and 12mm
- Standard Material: 316 SS with FKM O-ring
Other materials are available
- Cracking pressures: 1/3, 1, 5, 10 and 25 psi (0.2 to 1.7 bar)
- 100% factory tested
Seat seal to 1000 psig with nitrogen
Cracking and resealing pressure verification


Pressures/Temperatures & Flow

Series	Maximum Flow Coefficient (C _v)	Normal Cracking Pressure PSI (BAR)	Downstream Pressure at 70°F (20°C) PSIG (BAR)
CH4	0.60	1/3, 1, 5, 10 and 25 (0.03, 0.07, 0.69 and 1.8)	6000 (413)
CH8	2.18		
CH16	3.25		

Cracking and Reseal Pressures

Nominal Cracking Pressure PSI (BAR)	Cracking Pressure Range PSIG (BAR)	Reseal Pressure PSIG (BAR)
1/3 (0.03)	Up to 3 (0.21)	Up to 6 (0.42)
1 (0.07)	Up to 4 (0.28)	Up to 5 (0.35)
5 (0.35)	3 to 9 (0.21 to 0.63)	Up to 2 (0.14)
10 (0.69)	7 to 15 (0.49 to 1.1)	3 (0.21) or more
25 (1.8)	20 to 30 (1.4 to 2.1)	17 (1.2) or more


Materials of Construction		
Component		316 SS
1	Inlet Body	316 SS
2	Poppet	316 SS
3	Spring	302/316 SS
4	O-Ring	FKM/NBR/EPM
5	O-Ring Retainer	316 SS
6	Connector Gasket	316 SS
7	Outlet Body	316 SS

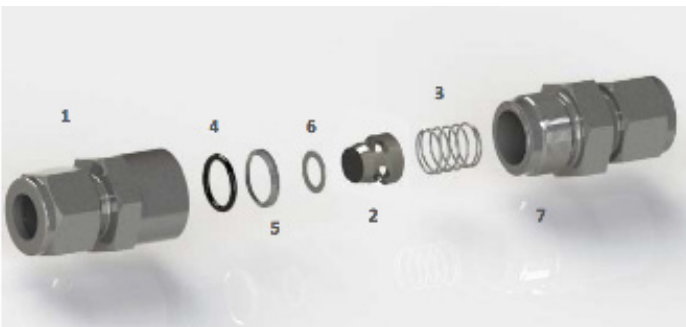

A Refreshingly New Idea for Clean Fuel Transportation



High Pressure Check Valves CH Series

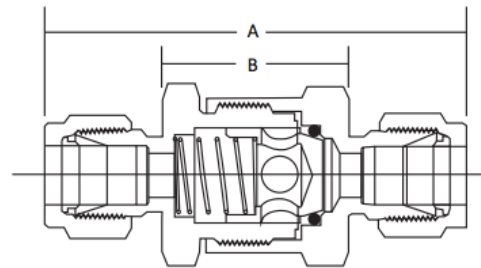

CH SERIES CHECK VALVES

Connections	Size	Basic Part Number	Valve Size	A	H (HEX)
				in. (mm)	in. (mm)
Fractional Tube Fitting	1/8	CH4-D2	CH4	2.27 (57.7)	11/16
	1/4	CH4-D4	CH4	2.44 (62.0)	11/16
	3/8	CH8-D6	CH8	2.75 (69.9)	1
	1/2	CH8-D8	CH8	2.96 (75.2)	1
	3/4	CH16-D12	CH16	3.53 (89.7)	1 3/4
	1	CH16-D16	CH16	3.88 (98.6)	1 3/4
Metric Tube Fitting	6	CH4-DM6	CH4	2.44 (62.0)	11/16
	8	CH8-DM8	CH8	2.70 (68.6)	1
	10	CH8-DM10	CH8	3.75 (69.9)	1
	12	CH8-DM12	CH8	2.96 (75.2)	1
Female NPT	1/4	CH4-4PF	CH4	2.26 (57.4)	11/16
	3/8	CH8-6PF	CH8	2.55 (67.8)	1
	1/2	CH8-8PF	CH8	3.03 (77.0)	1 1/16
	3/4	CH16-12PF	CH16	3.23 (82.0)	1 3/4
	3/4	CH16-12PF	CH16	3.83 (97.3)	1 3/4
Female ISO Tapered	1/4	CH4-4FRT	CH4	2.38 (60.5)	11/16
	3/8	CH8-6FRT	CH8	2.86 (72.6)	1
	1/2	CH8-8FRT	CH8	3.29 (83.6)	1 1/16
Male NPT	1/8	CH4-2PM	CH4	1.9 (48.3)	11/16
	1/4	CH4-4PM	CH4	2.17 (55.1)	11/16
	3/8	CH8-6PM	CH8	2.36 (59.9)	1
	1/2	CH8-8PM	CH8	2.73 (69.3)	1
	3/4	CH16-12PM	CH16	3.23 (82.0)	1 3/4
	1	CH16-16PM	CH16	3.67 (93.2)	1 3/4
	1	CH16-16PM	CH16	3.67 (93.2)	1 3/4
Male ISO Tapered	1/4	CH4-4MRT	CH4	2.17 (55.1)	11/16
	1/2	CH8-8MRT	CH8	2.73 (69.3)	1
Male/Female NPT	1/4	CH4-4PM4PF	CH4	2.26 (57.4)	11/16
	1/2	CH8-8PM8PF	CH8	2.89 (73.4)	1 1/16
Fractional Tube Fitting/ Male NPT	3/8	CH8-D6PM6	CH8	2.56 (65.0)	1
	1/2	CH8-D8PM8	CH8	2.74 (69.6)	1

A Refreshingly New Idea for Clean Fuel Transportation



High Pressure Check Valves CH Series



MATERIAL DESIGNATOR: Stainless Steel - 316

Example: CH4-D4-1-316

PART NUMBER CONFIGURATION

Cracking Pressure Designator	
Cracking Pressure psig	Designator
1/3	1/3
1	1
5	5
10	10
25	25

O-RINGS

FKM O-rings are the standard seal material on the CH check valves. To order non-standard O-rings insert the designator from the table below into the part valve number.

Example: CH4-D4-316-BU

Material	Designator	Temperature Rating °F(°C)
FKM	Blank	0 to 400 (-17 to 204)
Nitrile	-NBR	-40 to 250 (-40 to 121)
Low-Temp Nitrile	-NBR3	-65 to 275 (-53 to 135)
Ethylene Propylene	-EP	-50 to 300 (-45 to 148)
Kalrez	-KZ	-10 to 400 (-23 to 204)

PRODUCTION TESTING

Check valves are 100% factory tested with nitrogen after assembly to confirm spring cracking pressure, and for seat leakage at 1000 psi.

A Refreshingly New Idea for Clean Fuel Transportation

1333 Highland Road, Suite P | Macedonia OH 44056 | 330.998.7380 | insight-fuel.com