


HIGH-PRESSURE FILTER TRAP & DRAIN ASSEMBLY

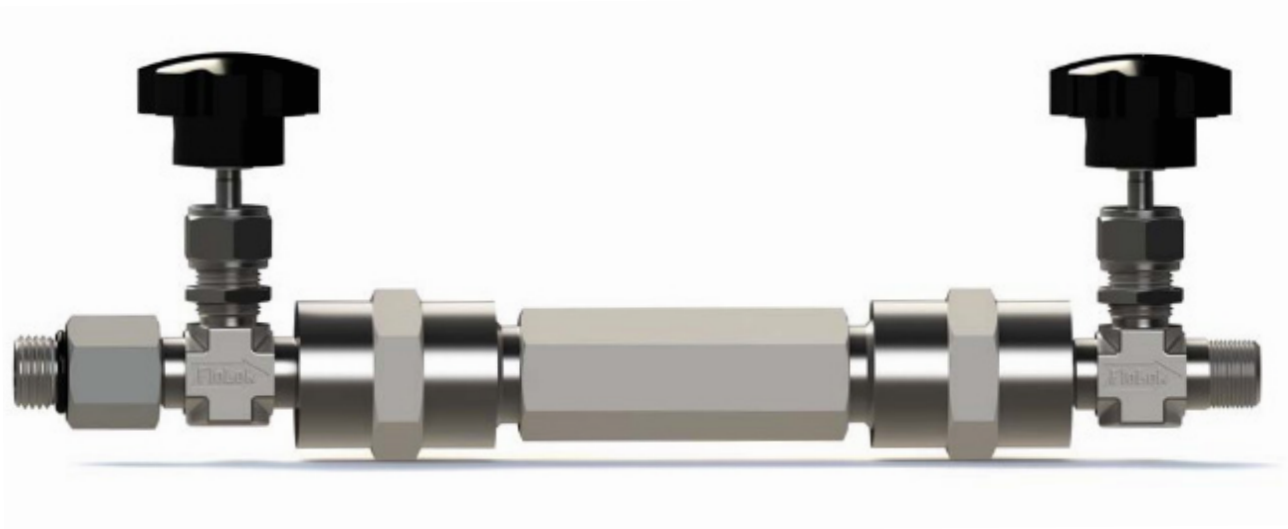

Features

- Allows safe incline draining of CNG gas filters
- 15 cc minimum reservoir volume
- Dual valve isolation protects coalescing filters from damaging differential pressure when draining
- SAE O-ring end connections standard
- Dual needle valve isolation allow gradual pressurization and depressurization of the assembly for safety and to protect filter elements
- Finger-tip control for sampling

Specifications

- Temperature Range: -40 to 300 °F
- Pressure Range: Up to 6000 psig
- Body Material: 316 SS
- End Connections: 9/16-18 SAE x 1/4 in MNPT
- O-ring Material: Low-Temperature NBR

Unique Benefits

- Drain CNG Gas filters safely without damage to the filters
- Monitor filter condition inline
- SAE straight thread fittings for easy maintenance
- Low temperature NBR O-rings